


FEATURES

LO/RF Frequency:	550 – 1100 MHz
Input IP2:	+64 dBm
Input IP3:	+15 dBm
Input P1dB:	+7 dBm
Amplitude imbalance:	0.1 dB rms
Quadrature phase error:	1.6° rms
LO Power:	+14 dBm

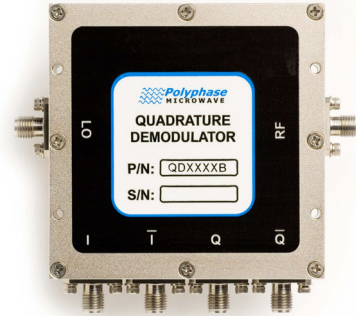


DESCRIPTION


The QD0511B is a quadrature (I/Q) demodulator optimized for direct conversion receivers. When the passive demodulator is supplied with a LO drive signal, the RF input is directly converted to differential I and Q baseband outputs.

Internally matched lowpass filters provide anti-alias functionality for interfacing to high-speed A/D converters.

For more information on interfacing the QD0511B to differential A/D converters and single-ended loads, please see Application Note 102A, "Interface Circuits for the QD Series Quadrature Demodulators."

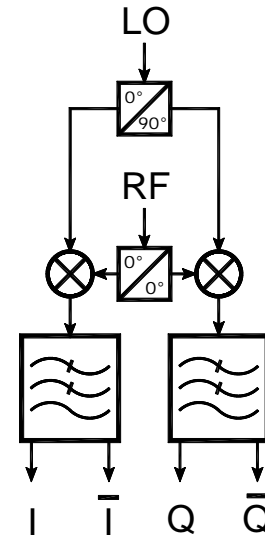

TYPICAL APPLICATION: DIRECT CONVERSION RECEIVER

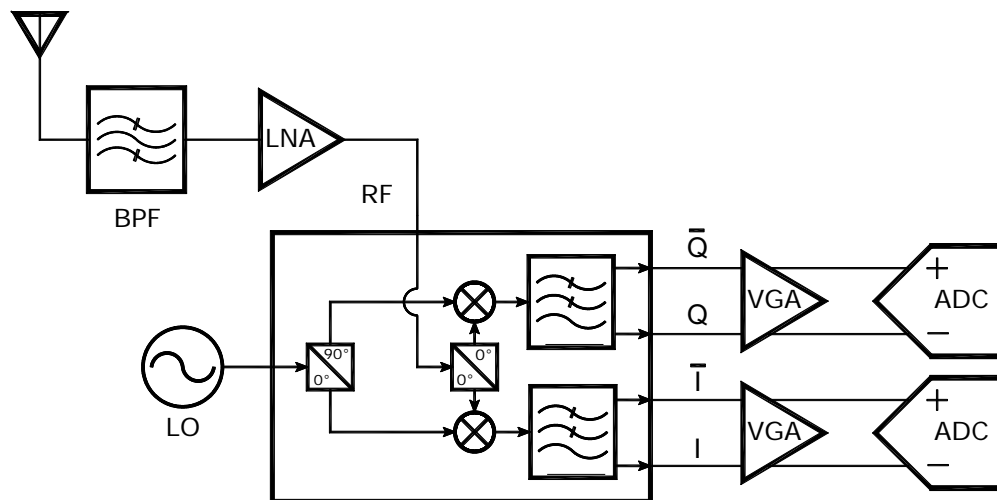

ELECTRICAL SPECIFICATIONS


Test Conditions: +25°C, LO = +14 dBm, RF = 0 dBm @ LO+100 kHz unless otherwise noted.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Frequency Range ¹		550		1100	MHz
LO Power		+13	+14	+16	dBm
LO VSWR			1.4:1		Ratio
RF VSWR			2.0:1		Ratio
I/Q Baseband Filter Bandwidth ²	<1 dB Flatness	DC		275	MHz
I/Q Baseband Filter Stop Band ²	>25 dB Rejection	450		5000	MHz
I/Q Differential Output Impedance			100		Ω
I/Q Baseband DC Offset	Into 100 Ω load	-4		+4	mV
Conversion Loss			8.5	10.5	dB
Noise Figure	No RF input drive		9		dB
Input IP2			+64		dBm
Input IP3	2-Tone, Δf = 1 MHz		+15		dBm
Input P1dB			+7		dBm
LO-RF Isolation	No RF input drive		65		dB
LO-IF Isolation	No RF input drive		70		dB
Amplitude Imbalance		-0.4	±0.1	+0.4	dB
Quadrature Phase Error		-4	±1.6	+4	Degree
Operating Temperature Range		-40		+85	°C
LO/RF Input Power w/o Damage				+25	dBm

Notes:

1. When RF > LO frequency: $I = \cos(t)$, $\bar{I} = -\cos(t)$, $Q = \sin(t)$, $\bar{Q} = -\sin(t)$
2. Standard lowpass filters. Contact factory for other options.


CASE DRAWING

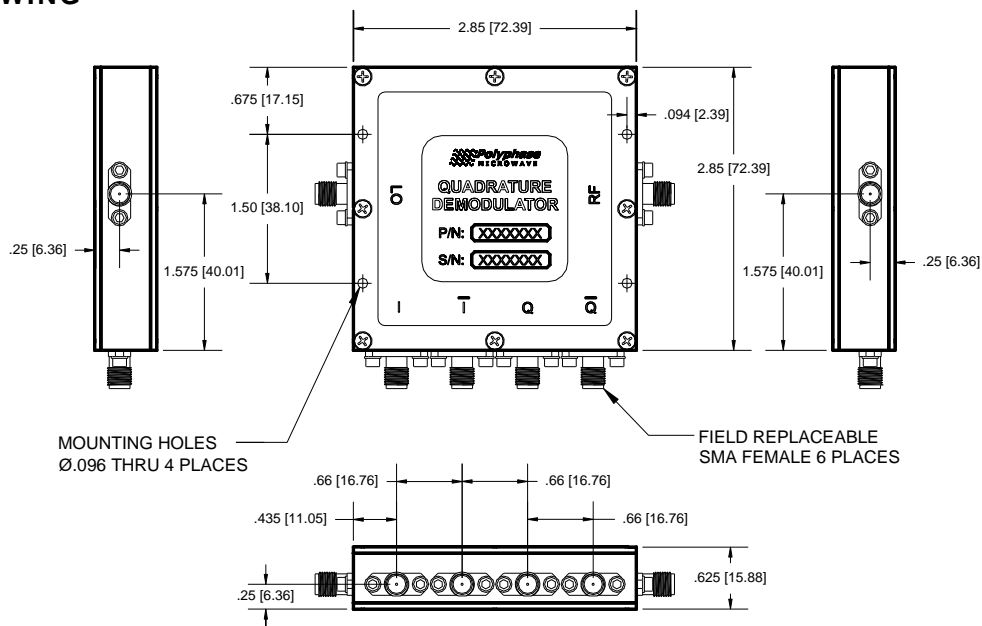


TYPICAL PERFORMANCE CHARACTERISTICS

Standard Test Conditions: +25°C, LO = +14 dBm, RF input = 0 dBm @ LO+100 kHz.


Conversion Loss

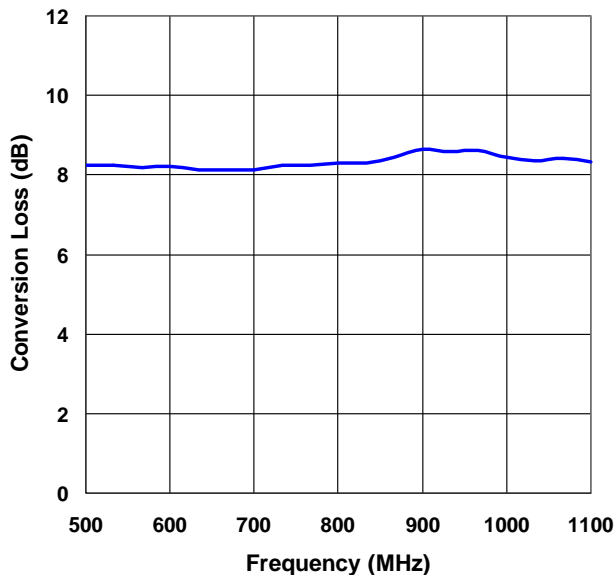


LO-RF Isolation

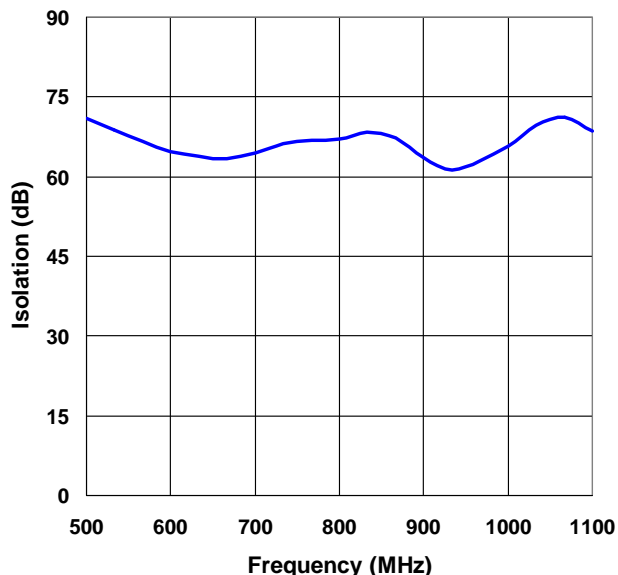

Amplitude Imbalance

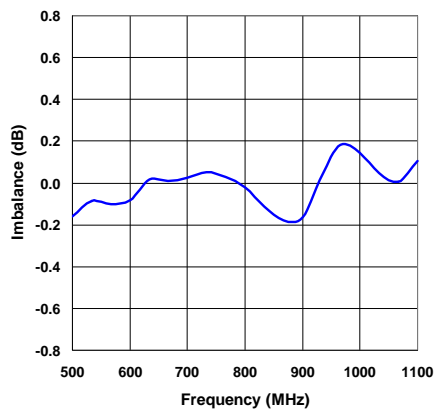

Quadrature Phase Error

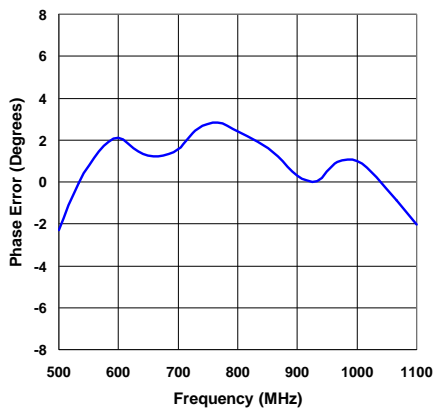

DC Offsets

